




## MARICOPA LIVE STEAMERS

### IBLS Wheel Standards

5-21-16

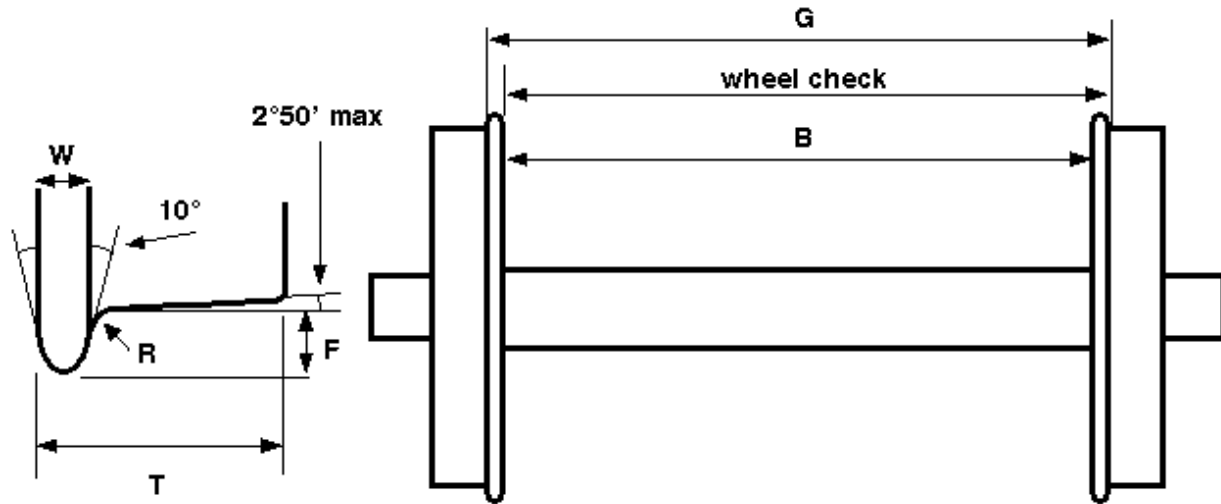

TRACK GAUGE (min.)		T (min.) TIRE WIDTH	W (max.) FLANGE WIDTH	F (max.) FLANGE DEPTH	R RADIUS	B BACK TO BACK	G WHEEL GAUGE	Wheel Check (ref.)
IBLS 3 1/2"	88.9 mm	10.31 mm	2.34 mm	2.34 mm	1.19 mm +/- 0.2	83.34 mm +0.5 / -0	88.14 mm +0 / -0.5	85.73 mm
	3.5"	0.406"	0.094"	0.094"	0.047" +/- 0.008	3.281" +0.02 / -0	3.470" +0 / -0.02	3.375"
IBLS 4 3/4"	120.65 mm	12.83 mm	3.17 mm	3.55 mm	1.57 mm +/- 0.25	112.7 mm +0.5 / -0	119.13 mm +0 / - 0.5	115.87 mm
	4.75"	0.505"	0.125"	0.140"	0.062" +/- 0.01	4.437" +0.02 / -0	4.690" +0 / -0.02	4.562"

IBLS 7 1/4"	184.15 mm	19.05 mm	3.96 mm	4.75 mm	2.39 mm +/- 0.38	174.5 mm +0.5 / -0	182.63 mm +0 / - 0.5	178.58 mm
	7.25"	0.750"	0.156"	0.187"	0.094" +/- 0.015	6.870" +0.02 / - 0	7.190" +0 / -0.02	7.031"
IBLS 7 1/2"	190.5 mm	19.05 mm	3.96 mm	4.75 mm	2.39 mm +/- 0.38	180.85 mm +0.5 / -0	188.98 mm +0 / - 0.5	184.94 mm
	7.50"	0.750"	0.156"	0.187"	0.094" +/- 0.015	7.120" +0.02 / - 0	7.440" +0 / -0.02	7.281"